


REMARKS

The above amendments to the claims have been made to correct the multiple dependency of the claims and to put the application in better condition for examination. No new matter has been added.

In the event that any fees are due in connection with this paper, please charge our Deposit Account No. 01-2300.

Respectfully submitted,

ARENT FOX KINTNER PLOTKIN & KAHN, PLLC

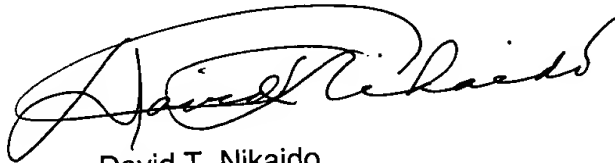

David T. Nikaido  
Attorney for Applicant  
Reg. No. 22,663

Atty. Docket No.: P100158-00039

Arent Fox Kintner Plotkin & Kahn, PLLC  
1050 Connecticut Avenue, N.W., Suite 600  
Washington, D.C. 20036-5339  
Telephone No. (202) 857-6000  
Facsimile No. (202) 638-4810

DTN/hk

FILED

## WHAT IS CLAIMED IS:

1. A pneumatic tire comprising:

a bubble-containing adhesive composition layer disposed as a puncture prevention layer in a tire inner surface.

2. A pneumatic tire according to claim 1, wherein said bubble-containing adhesive composition layer is made of a foamed body impregnated with an adhesive composition.

3. A pneumatic tire according to claim 1, wherein said bubble-containing adhesive composition layer is made of an adhesive composition containing hollow body particles and/or foamed body particles.

4. A pneumatic tire according to claim 1, wherein said bubble-containing adhesive composition layer is made of a foamed adhesive composition.

5. A pneumatic tire according to any one of claims 1 to 4, wherein porosity of said bubble-containing adhesive composition layer is set in a range of 30 to 97%.

6. A pneumatic tire comprising:

a puncture prevention layer formed by covering at least one surface of a sheet-like foamed body with a nonporous adhesive composition layer,

wherein said puncture prevention layer is stuck to an area corresponding to at least a tread portion of a tire inner surface in a manner of setting the foamed body inside the adhesive composition layer.

7. A pneumatic tire according to claim 6, wherein both surfaces of the sheet-like foamed body are covered with the adhesive composition layer.

8. A pneumatic tire according to one of claims 6 and 7, wherein the adhesive composition layer is formed by spraying.

9. A pneumatic tire according to *Claim 6 or 7* ~~any one of claims 6 to 8~~, wherein the sheet-like

1, 2, 3, 4, 6 or 7

11. A pneumatic tire according to claim 10, wherein the elastomer is one selected from the group consisting of butyl rubber, polyisobutylene, natural rubber, isoprene rubber, and polybutene.